

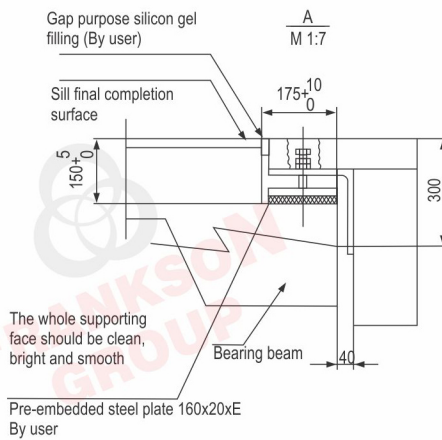


0° Moving walk Construction layout parameters

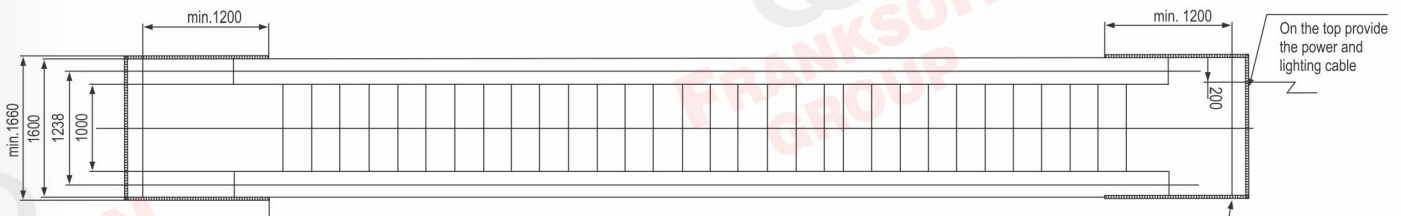

FRANKSON[®]
GROUP

Elevator & Escalator

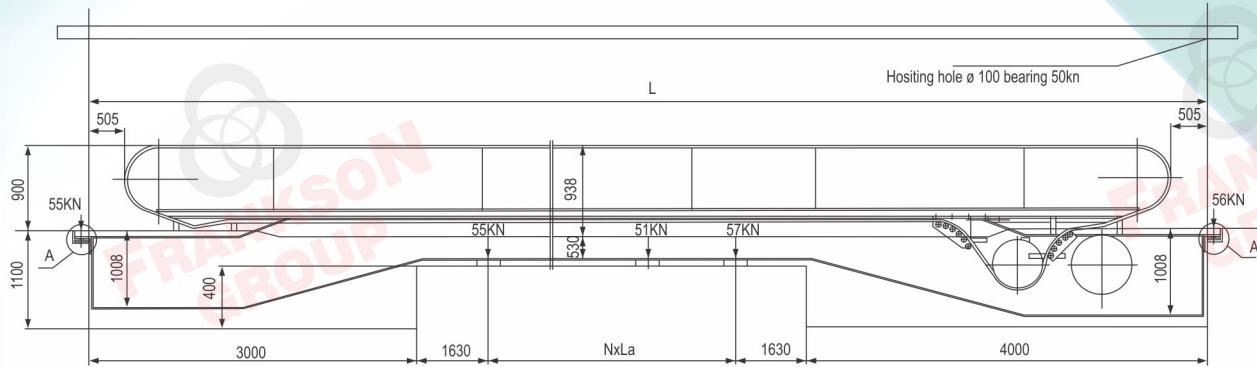

It should fill or cover the gap between the machine and the construction. The user should take care of the standard which is applicable for the well width.

Model	Traveling Height	Rated speed	Rated load capacity	Inclination	Motor power	A (mm)	B (mm)	C (mm)	D(mm)
SMEH (800/0°)	80000	0.5	6750	0	5.5	800	1038	1400	≥1460
	80000 < L ≤ 130000				8				
	130000 < L ≤ 150000				11				
SMEH (1000/0°)	70000	0.5	9000	0	5.5	1000	1238	1600	≥1660
	70000 < L ≤ 110000				8				
	110000 < L ≤ 150000				11				